

ecisk w rurze ochronnej DN250
 l. z powłoką PE; L=15.0m

S-530

S-54

S-55

S-56





S-540

S-541

S-560

S-561

S-562

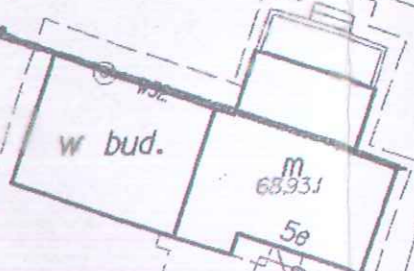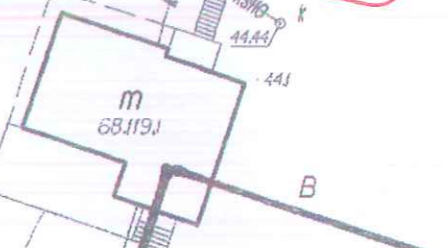

Rvb

PsV

PsV

Rvb

Rvb

LV1

LV1

zel. Ø100-106,5m

zel. Ø100-121,0m

33,0m

9,5m HP80

16,0m

zel. Ø100-108,5m

HP80

HP80

064

066

067

076

075

083

084

085

086

068

072

074

071

Tr1

42.36

42.50

40.83

12

44.25

44.25

44.25

44.15

44.15

44.35

44.35

44.35

44.35

41.76

42.06

42.11

41.92

42.22

42.22

41.81

39.73

41.81

41.92

42.11

42.11

44.00

42.00

44.35

44.35

42.11

42.11

44.00

41.57

44.00

44.00

41.85

41.85

44.00

41.90

44.00

44.00

41.45

41.45

44.00

41.90

44.00

44.00

41.60

41.60

44.00

41.90

44.00

44.00

41.71

41.71

44.00

41.55

44.00

44.00

41.55

41.55

44.00

41.60

44.00

44.00

41.60

41.60

44.00

41.90

44.00

44.00

41.90

41.90

44.00

41.81

44.00

44.00

41.81

41.81

44.00

41.81

44.00

44.00

41.81

41.81