

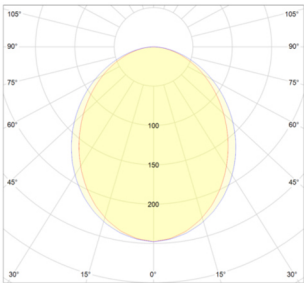


Limit EVO Z

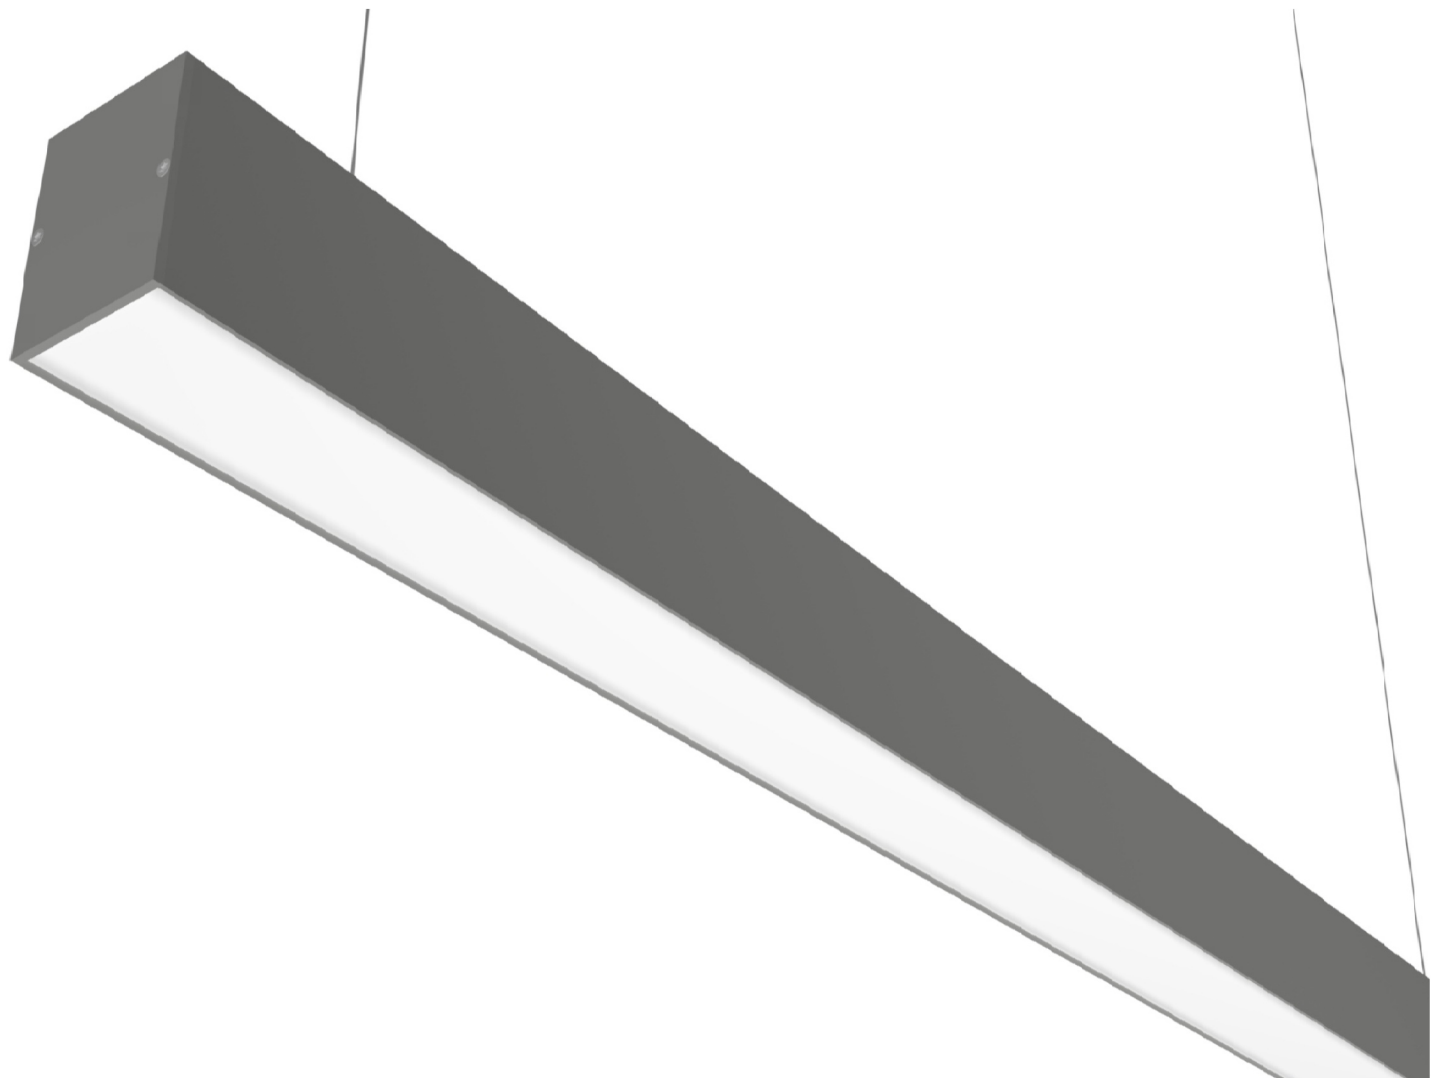

Klosz opalizowany PMO
Opal diffuser PMO

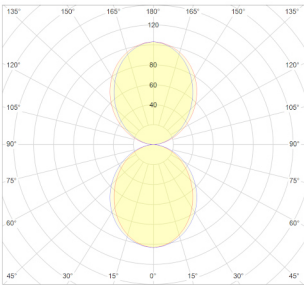

Klosz opalizowany PMO Up&Down
Opal diffuser PMO Up&Down

Źródło światła *Light source*

LED

CRI>80

LED

CRI>90

Optyka *Optics*

PMO

73%

MPRM

75%
UGR<19

Stopień ochrony *Protection rating*



IP20

Kolory *Colours*

RAL


9006

RAL

9005

RAL

9016

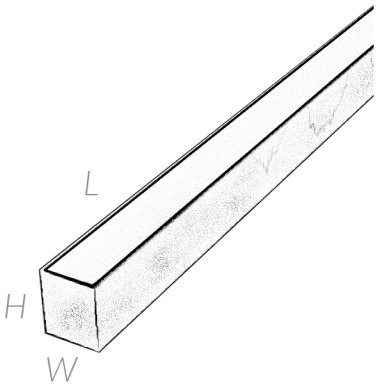

Źródło światła Light source	Strumień źródła Luminous flux [lm]	Moc Power [W]	L [mm]	W [mm]	H [mm]
LED ¹	2200	12	574	46	60
LED ¹	3300	18	854	46	60
LED ²	3300 + 1100	24	854	46	60
LED ¹	4400	24	1134	46	60
LED ²	4400 + 2200	36	1134	46	60
LED ¹	5500	30	1414	46	60
LED ²	5500 + 3300	48	1414	46	60
LED ¹	6600	36	1694	46	60
LED ²	6600 + 4400	60	1694	46	60
LED ¹	7700	42	1972	46	60

¹ Rozsył direct Direct light distribution

² Rozsył direct-indirect Direct-indirect light distribution


PL

Zwieszana oprawa oświetleniowa wykonana z ciągnionego, malowanego proszkowo aluminium. Możliwość łączenia w systemy oraz dostosowania długości i parametrów świetlnych do wymagań projektowych po konsultacji z producentem. Oprawa wyposażona w źródła **LED Long Life-time** o czasie świecenia **70.000 godzin** (L80 B10). Temperatura barwowa 3000K, 4000K lub 5000K.


EN

Suspended luminaire made of extruded, powder coated aluminium. Possibility to combine luminaires into lighting systems and to adjust length and LED flux to project requirements after consulting the manufacturer. The luminaire is equipped with **Long Life-time LED** sources with a lighting time of **70.000 hours** (L80 B10). Color temperature 3000K, 4000K or 5000K.


Dopasuj oprawę do swojego projektu
Customize the luminaire to your project




ADJUST
WIDTH




ADJUST
LENGTH




ADJUST
LED FLUX




LINEAR
SYSTEM




ANGULAR
SYSTEM




DOWN




UP&DOWN




MPRM CDP




SENSOR




DALI




TOUCH DALI



TUNABLE
WHITE



WINDOW



ENGRAVER