

**ul. Kłodzka**

Przepompownia

Partner kontaktowy:  
Numer zlecenia:  
Firma:  
Numer klienta:


Data: 16.03.2016  
Edytor: BBKS Projekt

Edytor BBKS Projekt  
Telefon  
faks  
e-Mail

## SCHREDER TECEO 1 / 5120 / 48 LEDS 500mA CW / 330742 / Karta danych oprawy



Wylot światła 1:

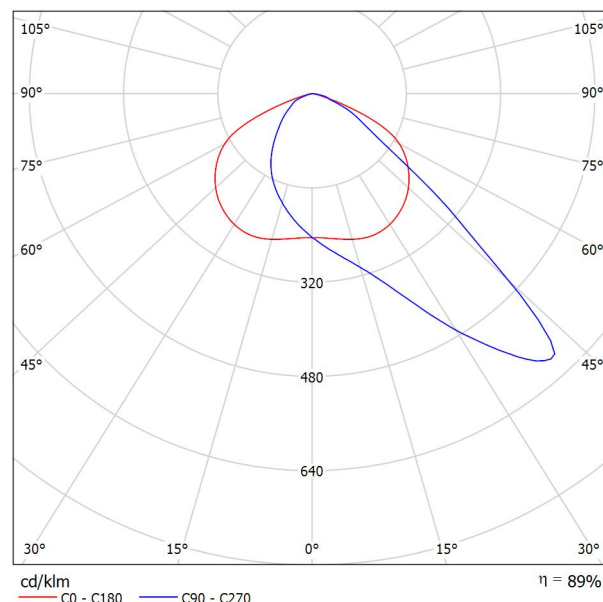

Klasyfikacja oświetleń CIE: 100  
Kod Flux CIE: 48 88 99 100 89

powodu braku właściwości symetrycznych nie można przedstawić tabeli UGR dla tego oprawa.

The Teceo range offers optimised photometrical performance with a minimum total cost of ownership. It offers towns and cities the ideal tool to improve public lighting levels, generate energy savings and reduce their ecological footprint. The Teceo range comes in two sizes. The Teceo 1 for up to 48 LEDs is ideally suited to lighting residential streets, urban roads, bike paths and car parks, while the Teceo 2 for up to 144 LEDs is perfect for large roads, avenues and motorways. Teceo luminaires have been designed to fulfil the FutureProof concept: the photometric engine is IP 66 sealed to protect the LEDs and lenses from coming into contact with the outside environment and maintain photometric performance over time. Photometric engine and electronic assembly is easy to replace on-site at the end of its service life in order to take advantage of future technological developments. This easy and rapid procedure reduces maintenance costs and contributes to reducing the total cost of ownership.

#### Applications:

Recommended height installation: between 4m and 12m

Painting: Polyester powder coating

Colour: AKZO grey 400 sanded and black 200 sanded

Other colours RAL or AKZO on request

#### TECEO 1 - Your configuration:

Reflector: 5120

Protector: Glass Extra Clear Flat Smooth

Source: 48 LEDS 500mA CW

Settings: - - 330742

Dimensions: Width: 318 Height: 113 Length: 607 Weight: 9,6


Mechanical and electrical characteristics: IP: IP66 IK: IK08 Electrical Class:

Class II EU, Class I EU

Due to the continuous research and development we undertake on our products, we reserve the right to alter the specifications without notice. As these may present different characteristics according to the requirements of individual countries, we invite you to consult us.

Edytor BBKS Projekt  
 Telefon  
 faks  
 e-Mail

### Przepompownia / przepompownia / Powierzchnia 1 / Izolinie (E)

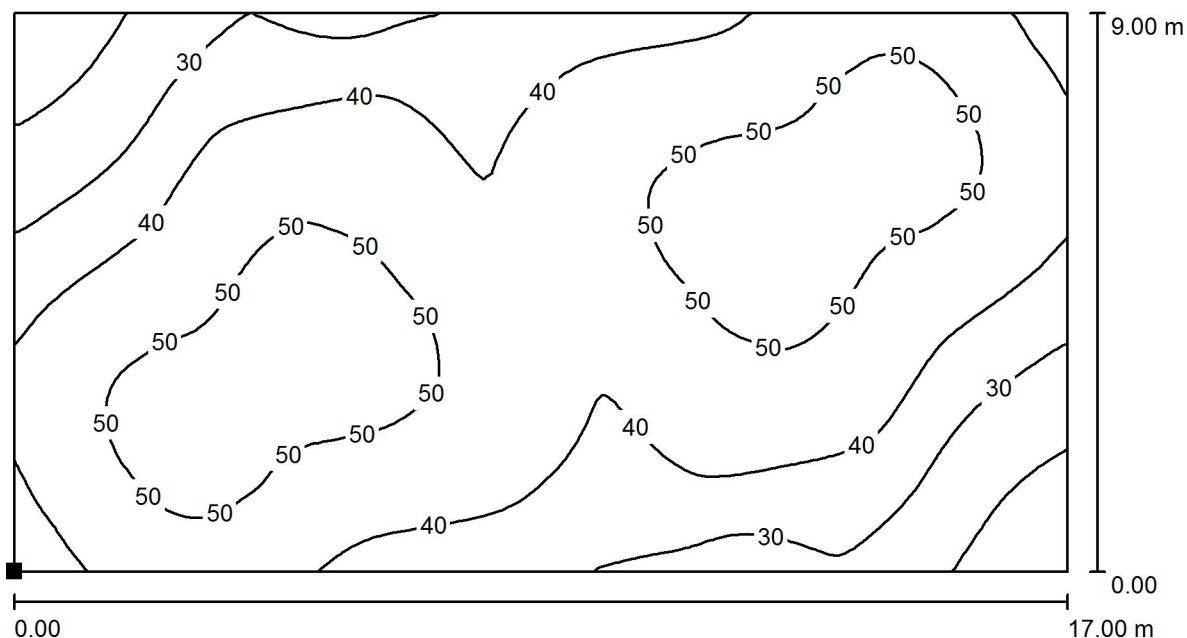

Wartości Lux, Skala 1 : 122

Położenie powierzchni w scenie  
 zewnętrznej:  
 Zaznaczony punkt:  
 (-8.500 m, -4.500 m, 0.000 m)



Siatka: 128 x 64 Punkty

$E_m$  [lx]  
42

$E_{min}$  [lx]  
13

$E_{max}$  [lx]  
53

$E_{min} / E_m$   
0.303

$E_{min} / E_{max}$   
0.241