
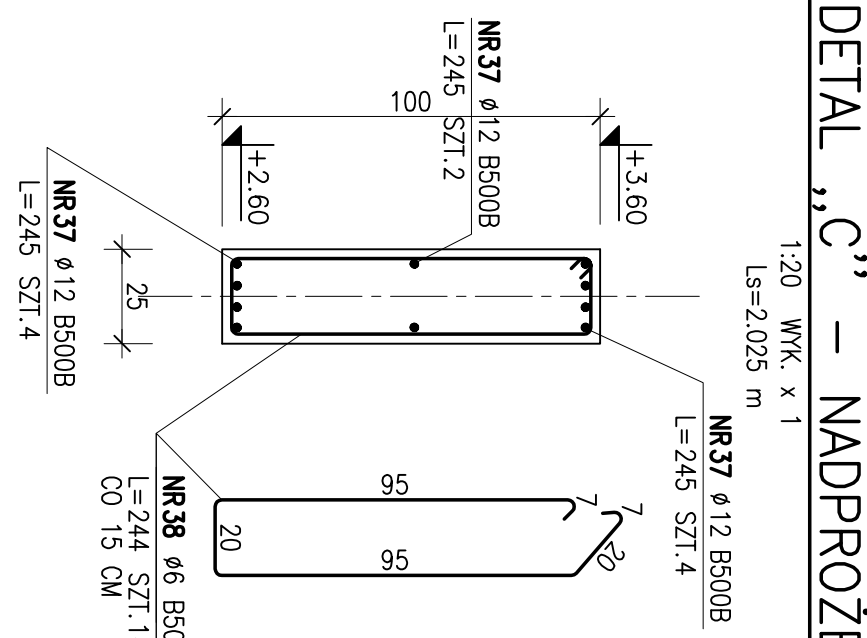
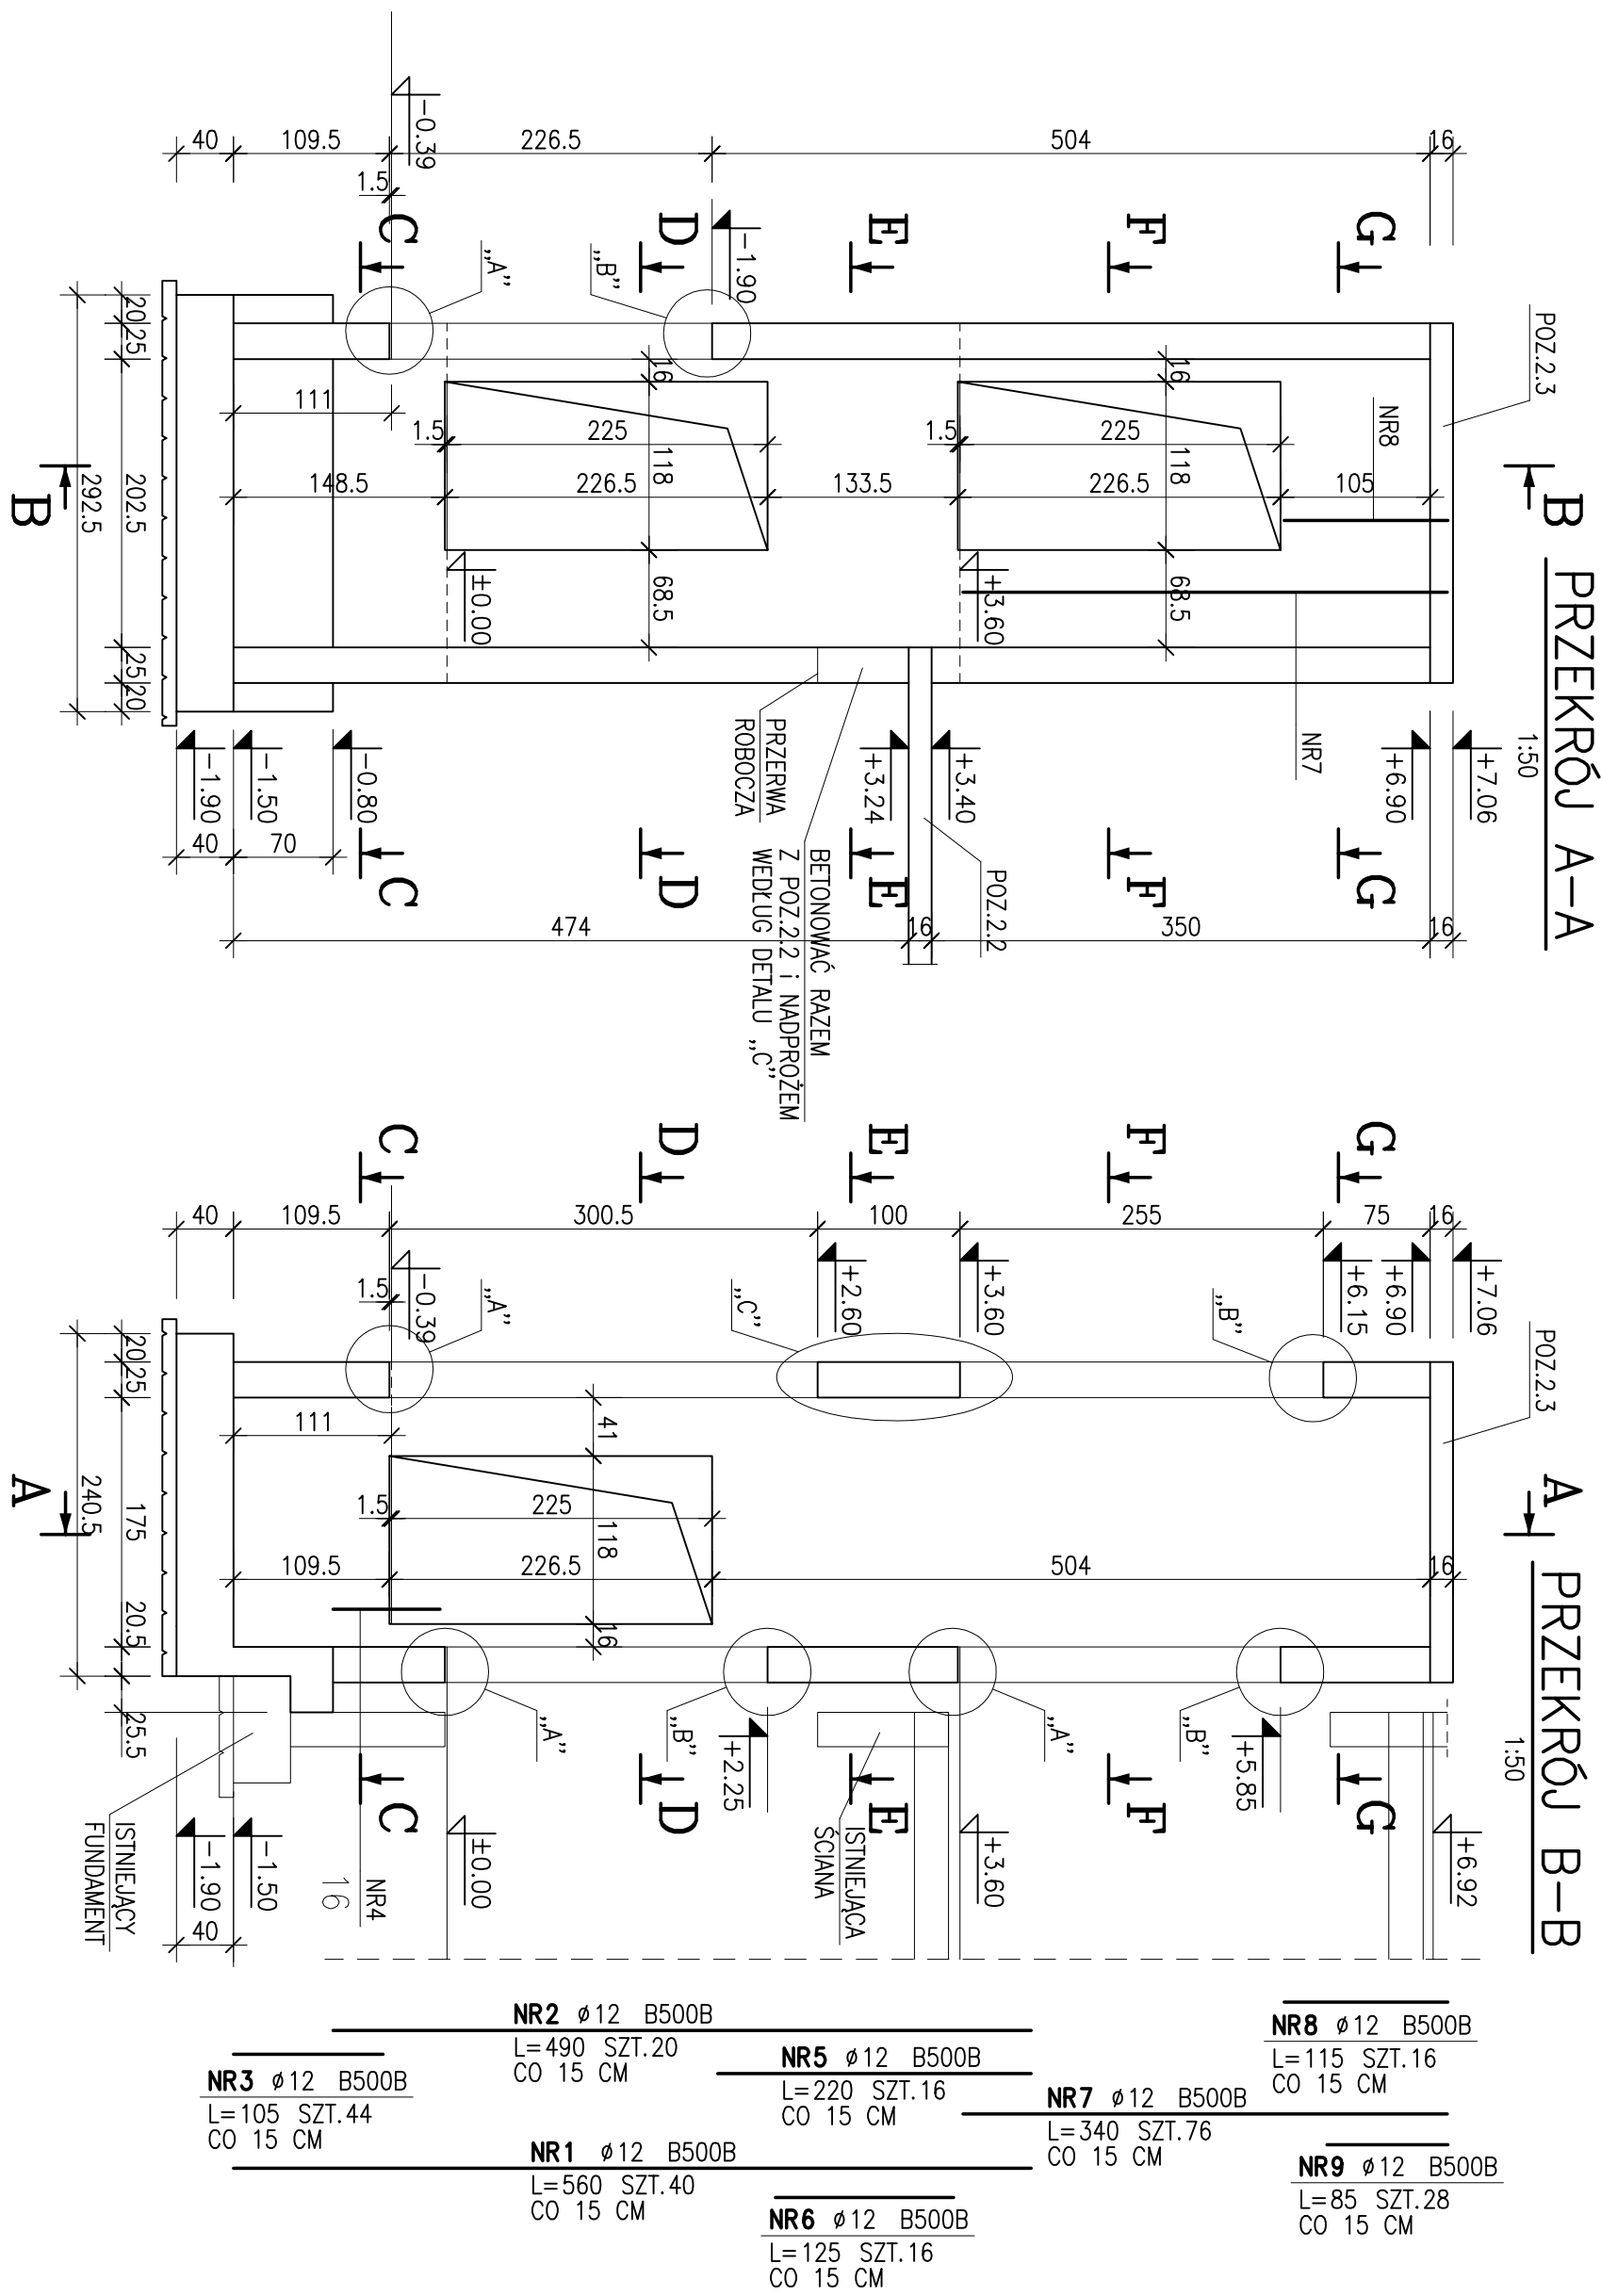


ZESTAWIENIE SIŁ					DŁ. LĄCZNA [m]	
FOL.	NR. RZĘDZ	ROZDZ. SIŁY	UŁAZN. SIŁY	65	66	B5006 413
	1	411 50008	560	40	89	274
	2	411 50008	1005	20	98	462
	3	411 50008	1005	14	98	502
	4	411 50008	125	16	98	202
	6	411 50008	340	76	98	2564
	7	411 50008	560	40	98	274
	8	50008	115	16	98	184
	9	50008	247	66	98	734
	10	6 50008	247	66	98	16302
	11	6 50008	220	39	98	4268
	12	6 50008	105	433	98	45455
	13	6 50008	126	45	98	567
	14	6 50008	126	45	98	567
	15	6 50008	89	60	98	528
	31	6 50008	60	38	98	228
	32	6 50008	740	9	98	142
	33	6 50008	240	5	98	48
	34	411 50008	120	38	98	102
	35	411 50008	170	6	98	46
	36	411 50008	240	7	98	44
	37	411 50008	240	7	98	44
	38	6 50008	244	14	98	235
	39	6 50008	244	14	98	235
	14.05.65	UŁAZN. [kg]		14.16	11.93	9863
	14.05.65	UŁAZN. [kg]		11.22	10.95	8985
	14.05.65	UŁAZN. [kg]		68.03	44.66	11728
	14.05.65	UŁAZN. [kg]		27.86	11.82	4661
	14.05.65	UŁAZN. [kg]		1192.86		

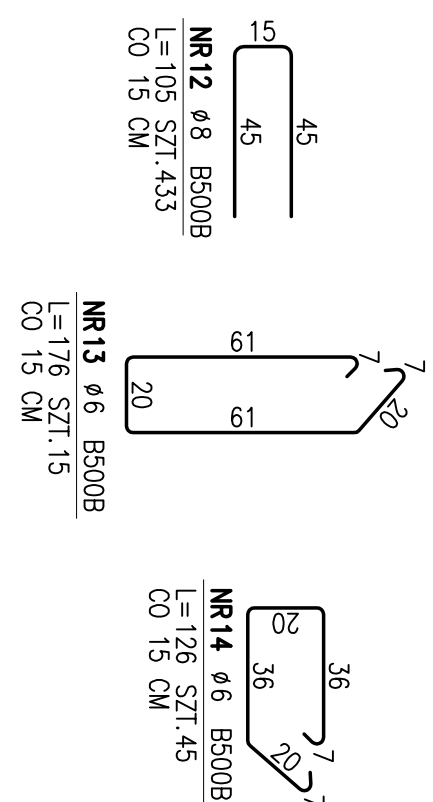

KLASA EKSP. XC1
BETON C25/30
młds. średnica kruszywa 16 mm
młds. słossinek w/c 0,60
STAL B500B fyk=500 MPa

[illegible]